

### Overview

The 960 Series non-relampable snap mount rectangular indicator lights are designed for mounting into a 1.281" x .395" hole with panel thickness ranges from .045" to .090".

### Approvals

U.L. Listed for units with wire leads; UL Recognized for units with terminals. All units are CSA Certified.

### Specifications

**Housing:** White nylon (standard), black optional, other colors available to special order.

**Bezel:** Chrome-plated.

**Terminations:** Wire leads: Black #18 gauge, PVC plastic insulated. UL-CSA rated at 105°C. 6" long, 1/2" stripped.

**Terminals:** Brass, Tin-plated 1/4" or 3/16" quick connect.



**Incandescent AC or DC Voltage options:** 6 to 28 volts.

**High Brightness Neon AC Voltage options:** 125 to 250 volts.

**Lens:** Heat resistant, high strength polycarbonate. Fluted (Standard). Smooth face available to special order.

**Lens Marking:** Lenses may be stamped. Contact factory.

**Mounting:** Designed to snap securely into a 1.281" x .395" hole. Panel thickness ranges from .045" to .090".

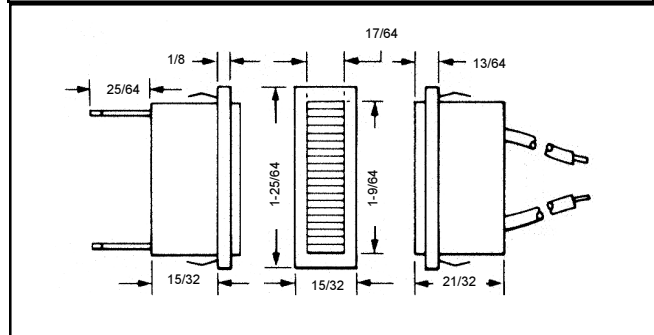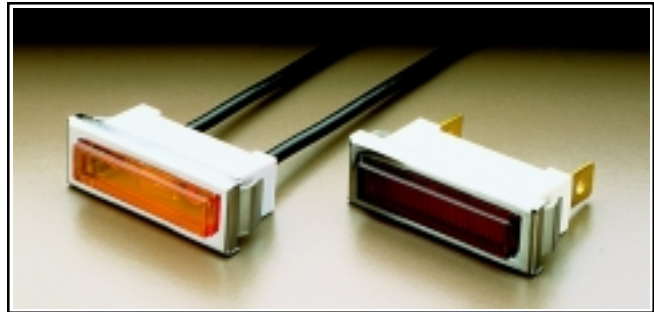

### ORDERING INFORMATION:

EXAMPLE: 961 6 71 T 90 W AN

Chrome Plated Bezel

Wire Leads

250 Volt Neon Lamp

Built-in 150K OHM Resistor

Rectangular Fluted Lens

White Housing

Amber Non-Diffusing Lens

Series Number	Termination	Lamp				Resistor	Lens Type	Housing Color	Lens Color		
		Code	Volts	MA	Life (Hrs)						
961 Chrome Plated Bezel	6 6" Wire Leads	10	6.0	40	10,000	X None (No Resistor required with incandescent lamps)	90 <sup>5</sup> Rectangular (Fluted) Standard	W White (Standard)	Nondiffusing (Clear)		
		12	6.3	200	5,000						
		02	6.3	200	20,000						
		13	14.0	80	1,500						
		03	14.0	80	15,000						
		15	28.0	40	4,000						
	7 .187" Q.C. Terminals	NEON (High Brightness)					A 22K OHM		91 Rectangular (Smooth)	B Black (Optional)	AN Amber BN Blue CN Colorless GN Green RN Red WN White (Cloudy) YN Yellow
		70 <sup>2</sup>	125	1/3 W	10,000						
		70 <sup>2</sup>	250	1/3 W	10,000						
		56 <sup>3</sup>	125	1/3 W	10,000						
		56 <sup>3</sup>	250	1/3 W	10,000						
		57 <sup>4</sup>	125	1/3 W	10,000						
8 .250 Q.C. Terminals	57 <sup>4</sup>	250	1/3 W	10,000	T 150K OHM						
	57 <sup>4</sup>	250	1/3 W	10,000	B 30K OHM						
	57 <sup>4</sup>	250	1/3 W	10,000	E 100K OHM						

<sup>2</sup> Standard Neon. Use with lens colors AN, CN, RN, WN, or YN.

<sup>3</sup> Green Neon. Use with lens colors CN, GN or WN.

<sup>4</sup> Blue Neon. Use with lens colors BN, CN, or WN.

<sup>5</sup> Nondiffusing lens colors.

<sup>6</sup> Not recommended for use with neon lamps.